


陶瓷谐振器 Ceramic Resonators Unit
 产品型号 HERC21-ZTB Leaded

外形尺寸(单位:毫米)

Figure and Dimensions(Unit: mm)

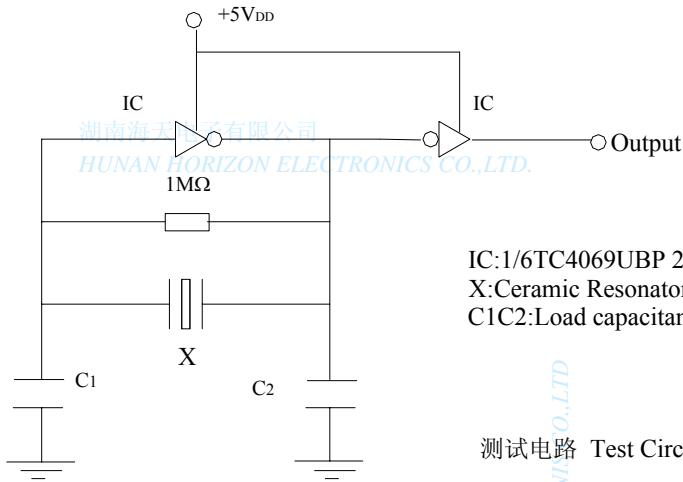

IC:1/6TC4069UBP 2
 X: Ceramic Resonator
 C1C2: Load capacitance

测试电路 Test Circuit



产品特征 Features

- 低阻抗 Low Resonant Impedance
- 低成本、重量轻 Low Cost, Light Weight
- 频率低 Low Frequency Range

产品规格 Specification

型号	频率范围	频率精度	老化率	谐振阻抗	温度稳定性	负载电容	
Part Type	Freq.Range (kHz)	Freq. Accuracy 25°C	Ageing 10 years	Resonant Impedance	Temp.Stability -20°C ~ 80°C	C ₁	C ₂
ZTB	190~249	± 1 kHz	± 0.3%	≤ 20Ω	± 0.3%	330 pf	470 pf
ZTB	250~374	± 1 kHz	± 0.3%	≤ 20Ω	± 0.3%	220 pf	470 pf
ZTB	375~429	± 2 kHz	± 0.3%	≤ 20Ω	± 0.3%	120 pf	470 pf
ZTB	430~509	± 2 kHz	± 0.3%	≤ 20Ω	± 0.3%	100 pf	100 pf
ZTB	510~699	± 2kHz	± 0.3%	≤ 20Ω	± 0.3%	100 pf	100 pf
ZTB	700~799	± 0.5%	± 0.3%	≤ 70Ω	± 0.3%	100 pf	100 pf
ZTB	800~1250	± 0.5%	± 0.3%	≤ 100Ω	± 0.3%	100 pf	100 pf

订购须知 Order Information

HERC11□ -Frequency-Packaging

HERC21	产品系列 Product Family ZTB
Frequency	频率 Frequency(MHz)
Packaging	包装 Packaging
	<ul style="list-style-type: none"> ■ T for Tape & Reel ■ B for Bulk

订购举例: Example : HERC21-250.000kHz-B

HERC21	产品系列 Product Family ZTB
250.000kHz	频率 Frequency \ f ₀ =250.000kHz
B	包装 Packaging for Bulk

[Http:// www.horizonxtal.com](http://www.horizonxtal.com)

国际贸易 Horizon International Marketing

国内贸易 Horizon Domestic Marketing

E-mail: horizoncrystals@163.net

E-mail:hqq226@163.net

Fax: 0086 731 8442 2043

Fax: 0086 731 8805 0850

Tel: 0086 731 8442 3897 / 8222 4572

Tel: 0086 731 8805 0851 / 8805 0780